

8-18-00

A

08/17/00
JC907 U.S. PTO

UNITED STATES PATENT APPLICATION TRANSMITTAL FORM

Box: NEW PATENT APPLICATION
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Docket No.: YOR9-1999-0564

jc862 U.S. PTO
09/641156
08/17/00

"Express Mail" mailing label number: **EL 568 962 368 US**
Date of Deposit: **August 17, 2000**

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and addressed to the Asst. Commissioner for Patents, Washington, D.C. 20231.

Suzanne Bates
(Name of person mailing paper)

Suzanne Bates
(Signature of person)

Sir:

Transmitted herewith for filing is the patent application of

Inventors:

David M. Chess
Ian N. Whalley
Steve R. White
John F. Morar

For:

PHYSICAL KEY SECURITY MANAGEMENT METHOD AND APPARATUS FOR INFORMATION SYSTEMS

Enclosed are:

- ☒ Declaration and Power of Attorney and an Associate Power of Attorney;
- ☒ 17 pages of Specification, 11 pages of Claims and 1 page of Abstract;
- ☒ 6 sheets of drawings;
- ☒ An Assignment of the invention to: International Business Machines Corporation, Armonk NY U.S.A., with Assignment Recordation Form;
- ☐ Information Disclosure Statement (and Form PTO-1449 with copies of cited documents);

08/17/00

The Filing Fee is calculated below.

CLAIMS AS FILED

(1) For	(2) Number Filed	(3) Number Extra	(4) Rate	(5) Basic Fee
				\$690.00
Total Claims	51 - 20 =	31	\$ 18.00	\$558.00
Independent Claims	3 - 3 =	0	\$ 78.00	\$ 0
Assignment Recordal Fee:				\$ 40.00
TOTAL FILING FEE				\$1288.00

X A check in the amount of **\$1288.00** in payment of the filing fee is enclosed.

Charge \$ _____ to Deposit Account No. 01-0467.

Fee Deficiency: The Commissioner is hereby authorized to charge any additional fees under 37 C.F.R. 1.16 and 1.17 which may be required for this communication or during the entire pendency of this patent application, or credit any overpayment, to Deposit Account No. 01-0467.

Address all future communications to:

Harry F. Smith, Esq.
OHLANDT, GREELEY, RUGGIERO & PERLE, L.L.P.
One Landmark Square
Suite 903
Stamford, CT. 06901

Direct phone calls to Harry F. Smith at (203) 327-4500

8/17/2000
Date of Signature

Harry F. Smith
Harry F. Smith, Esq.
Attorney for Applicant(s)
Ohlandt, Greeley, Ruggiero & Perle
Registration No. 32,493
(203) 327-4500

EXPRESS MAIL NO.: EL 568 962 368 US

International Business Machines Corporation Docket No.:
YOR9-1999-0564

Ohlandt, Greeley, Ruggiero & Perle, L.L.P. Docket No.:

5 909.0014 USU

Patent Application Papers of: David M. Chess

Ian N. Whalley

Steven R. White

John F. Morar

10 **PHYSICAL KEY SECURITY MANAGEMENT METHOD AND APPARATUS**
 FOR INFORMATION SYSTEMS

FIELD OF THE INVENTION:

15 This invention relates generally to methods and apparatus
for defining and controlling access to resources, including
information, in an information system, and more
particularly relates to the use of physical objects for
defining and controlling access such resources.

BACKGROUND OF THE INVENTION:

20 Currently available information appliances include Personal
Digital Assistants (PDAs), digital cameras, multimedia
centers, disk drives, printers, etc. This list is
continually growing as more devices are constructed to
contain intelligence, as well as Internet-connectivity.
However, before true information appliances can become
25 generally accepted by and useful to the majority of the
consumer public, they must be as simple to buy and install
as possible. One of the barriers to this in the current
environment is that, for any appliance that stores or
utilizes data that the consumer or some other principal
30 considers private or privileged, the tasks involved in
security administration, security key-maintenance, and
related activities are often too complex and/or error-prone

to be reliably performed by the typical information appliance consumer.

OBJECTS AND ADVANTAGES OF THE INVENTION:

5 It is a first object and advantage of this invention to provide an improved technique to simply and reliably manage security-related tasks in an information system that includes one or more information appliances.

10 It is another object and advantage of this invention to provide an information system that simply and reliably manages security-related tasks through the use of a tangible, physical object that contains security-related data.

15 It is a further object and advantage of this invention to provide an information system that simply and reliably manages security-related tasks through the use of a plurality of tangible, physical objects containing security-related data, wherein one object, or two or more corresponding related objects, referred to herein as "keys", are inserted within or swiped through receptacles
20 having compatible sensors for reading the security-related data.

SUMMARY OF THE INVENTION

25 The foregoing and other problems are overcome and the objects of the invention are realized by methods and apparatus in accordance with embodiments of this invention.

The teachings herein provide security-configuration and key-management methods that make use of physical objects to represent keys, and thereby leverage the average consumer's experience with physical keys (e.g., door keys, car keys,

etc.) in order to simplify the management of computer security keys, authorizations, and related concepts.

Although the teachings of this invention are presented primarily in the context of the field of information systems and appliances, these teachings may be employed
5 wherever it is desirable to control the security configuration of a system through familiar, physically-based mechanisms.

One aspect of these teachings is that, rather than
10 manipulating menus, creating software keys and certificates, and so on, the user instead deals with physical objects. In one exemplary embodiment, if a consumer purchases a new hard disk, and then installs the disk onto his or her home network or LAN, other devices on
15 the consumer's home network are authorized to store data on the new hard disk by the user placing, for example, a bar-coded tag that comes with the hard disk into one of a plurality of slots or readers in a home security console.

20 In another exemplary embodiment, the user instead takes a "key" that belongs to the security console and inserts it into a slot in the new hard disk. In a further exemplary embodiment, the user takes a key from a slot in the hard disk, and a key from a slot in the security console, and
25 swaps them, thus "introducing" the two devices to each other.

In one illustrative embodiment, a user authorizes and enables a new device to "represent" the user (also referred to herein as a principal) by inserting or swiping a
30 physical object containing a private key or other secret code. When another party who controls another resource wishes to grant to the user, and the user's device(s), some level of access to the controlled resource, they grant

access by inserting or swiping an object representing the user (but not containing any secret data of the user) into the appropriate receptacle on a device corresponding to the resource.

- 5 In yet another embodiment, keys are obtained in pairs, and a device is authorized to access a resource by inserting or swiping one of the keys in a receptacle on the device, and the other key of the pair in a receptacle associated with the resource.

- 10 In a more general case, keys are obtained in groups which can be divided into subsets in a number of ways, and granting a particular level of access to a resource involves dividing the keys into subsets corresponding to the level of access desired, and providing one subset of
15 keys to the device, and another subset of keys to a receptacle representing the resource.

- In other embodiments, devices (including security consoles) may have a number of different receptacles, and different degrees of access are granted or authorized by inserting or
20 swiping the corresponding physical key in different receptacles on the same device. By example, there may one receptacle for "normal access", one receptacle for "guest access" and a third receptacle for "administrator access".

- In general, physical contact between the key and the
25 receptacle or reader is not required, so long as the key is placed within a readable distance of the receptacle's or the reader's sensor.

- Various levels of detail will be presented with regard to a number of embodiments of these teachings, such as the
30 ability to give "guest" access to a user's home Local Area Network (LAN), or to the user's personal data generally, to

a Personal Digital Assistant (PDA) of a visitor or friend, by inserting a "key" from the PDA into one of the "guest" slots on the user's home security console.

5 The physical key and use of the physical key of this invention is distinguished from conventional cards and the like, such as ATM cards, as the conventional cards merely provide an identification of the card holder, enabling the card holder to obtain already granted access or authorization. In this invention the physical key(s) are
10 used instead to control a security configuration of a system as a whole to determine which users are authorized to obtain what type of access to which resource(s).

15 An apparatus and a method is disclosed for enabling the secure installation and use of an information system having a plurality of nodes, where the plurality of nodes include at least one information appliance and at least one security console. The apparatus includes at least one data-carrying object containing security-related data, and at least one object receptacle that forms a portion of at
20 least one of the nodes. The data-carrying object is inserted into the receptacle for reading-out the security-related data for indicating to the information system a desired security configuration.

25 The teachings of this invention provide apparatus for the secure installation and use of an information system having a plurality of nodes, where the plurality of nodes include at least one information appliance and at least one security console. The apparatus includes at least one data-carrying object containing security-related data and
30 at least one object receptacle that forms a portion of at least one of the nodes. A data-carrying object is inserted into the receptacle for reading-out the security-related data for indicating to the information system a desired

security configuration.

In one embodiment the data-carrying objects are obtained in groups of at least three, and where access to a resource, including information, is obtained by providing one subset
5 of data-carrying objects from a group to a receptacle associated with a requestor of the resource, and a disjoint set of data-carrying objects from the same group is provided to the security console. Identifications of all individual data-carrying objects in the group may be
10 ascertained by viewing the security console, even if some subset of the data-carrying objects are provided to a receptacle associated with a requestor of the resource. A utilization of different disjoint subsets of the data-carrying objects in a group can indicate different
15 levels of trust to be granted to the requestor with respect to the resource, and the utilization of different disjoint subsets of the data-carrying objects in a group can indicate different levels of authorization to be granted to the requestor with respect to the resource. The data-
20 carrying objects in a particular group can be mechanically joined together to form an assemblage, and the assemblage is adapted to be attached to a device through a single connection.

BRIEF DESCRIPTION OF THE DRAWINGS

25 The above set forth and other features of the invention are made more apparent in the ensuing Detailed Description of the Invention when read in conjunction with the attached Drawings, wherein:

Fig. 1 is a simplified block diagram of an information
30 appliance;

Fig. 2 is a simplified block diagram of a security console;

Fig. 3 illustrates a system and network having a security console, at least one information appliance, and that operates using pairs of keys;

5 Figs. 4A and 4B are each a logic flow diagram depicting the operation of the security console of Figs. 2 and 3;

Figs. 5A and 5B are each a logic flow diagram depicting the operation of the information appliance of Figs. 1 and 3; and

10 Fig. 6 shows an example of a security console having various keys, including privileges keys, for various users.

DETAILED DESCRIPTION OF THE INVENTION

Referring to Fig. 1, and in accordance with a presently preferred embodiment of these teachings, an information appliance 100 includes a central processing unit (CPU) 101 that controls the overall operation of the appliance 100, and that also provides access to its resources 102 (such as, but not limited to, data storage media, printing functions, digital camera image capture, or specialized hardware). The information appliance 100 also includes a receptacle (sensor) 103 which provides to the CPU 101 data contained in or on a data-carrying device, medium or object (301, see Fig. 3) that is inserted into the receptacle 103. It should be noted that, as employed herein, the words "inserted", "inserting", "insertion" and the like are intended to mean placing a data-carrying object 301 into a receptacle 103 (or 203 as shown below) and leaving it in the receptacle for some period of time (e.g., minutes, days, months), as well as to mean only temporarily placing the data-carrying object 301 in the receptacle, or by somehow creating relative motion between the receptacle and the data-carrying object, such as by swiping the object

through the receptacle. In this latter case the data-carrying object 301 is considered to be "inserted" into the receptacle 103, 203, even if only for a few seconds. In other embodiments it is only necessary to place the data-carrying object 301 within a readable distance of the sensor 103, and no physical contact or insertion may be required at all.

The information appliance 100 also includes a network interface 104 through which the information appliance 100 communicates with other devices, including other information appliance(s) 100, security console(s) 200, computers, servers and the like. The network interface 104 can be a wired interface or a wireless interface, such as an RF interface or an optical interface.

Fig. 2 illustrates a security console 200 that includes a CPU 201, a bus 202, a plurality of receptacles (sensors) 203, and a network interface 204.

Fig. 3 illustrates the operation of the overall system, wherein, in this embodiment, data-carrying objects 301 (hereinafter referred to for brevity as "physical keys" or simply as "keys") are obtained in pairs. When the information appliance 100 is to be granted access to a resource controlled by the security console 200, one of a pair of keys 301 is inserted into a receptacle 103 on the appliance 100, and the other key is inserted into one of the receptacles 203 in the security console 200.

In one embodiment, the data-carrying keys 301 in any given pair are the same shape, and no two data-carrying keys 301 not in the same pair are the same shape. In another embodiment, the data-carrying keys 301 in any given pair are imprinted with the same visible identification code, and no two data-carrying keys 301 not in the same pair are

imprinted with the same visible identification code.

In yet another embodiment the data-carrying keys 301 in any given pair are fashioned so as to be mechanically joined together, such as by snapping together, and no two
5 data-carrying keys 301 not in the same pair will snap together (or are unlikely to snap together, as when specific shapes of keys are repeated, but where false matches are unlikely due to the large number of possible shapes).

10 The security console 200 is shown in Fig. 3 to be a separate network-connected device, although in other embodiments it may be part of, or attached to, a general network console or general-purpose server or other computer.

15 The security console 200 may have a number of different receptacles 203, reflecting a number of different roles that the corresponding device (information appliance 100) may play in the network. Each role reflects both how trusted the information appliance 100 is (e.g., completely
20 trusted, or trusted only as a "guest"), and what purpose the information appliance 100 serves (e.g., storage, printing, display, general-purpose peer functions, and so on).

When a new information appliance 100 is obtained, a pair of
25 keys 301 are also obtained, and one key 301 is inserted into the information appliance 100, thereby effectively informing the appliance 100 of its identity, and the other key 301 is inserted into the security console 200, thereby effectively informing the security console 200 of the role
30 that the information appliance 100 will play in the overall network. In this manner the network security policy can be established with respect to one or more information

appliances 100 and the security console 200, and/or any other object-controlling resources that may be present, and that also include at least one receptacle 203.

In this embodiment, the data stored on the keys 301 includes a cryptographic key, certificate, or other security-related data, and is stored on a magnetic strip by methods known to the art, in the same way that data is commonly stored on credit cards and cards for Automated Teller Machines (ATMs). In alternate embodiments, the data is stored in a small computer embedded in the key (by methods known to the art as used in "smart cards"), or printed on the key in the form of a UPC or other "bar code" known to the art. In general, the data may be stored on or in the key(s) 301 by any suitable technique, and the corresponding receptacle(s) 103, 203 are assumed to incorporate a corresponding and suitable sensor (e.g., magnetic, optical, electrical, etc.) for reading stored data from the key 301.

With reference now to the logic flow diagrams of Figs. 4A, 4B, 5A and 5B, and more particularly first to Fig. 4A, when the security console 200 receives (401) a request from an information appliance 100, it iterates through each of the keys 301 that are present in its various receptacles 203 to authenticate the requestor (402). During the iteration, for each (receptacle) key 301 that is present, data is accessed (403) from the key 301, and preferably using encryption and authentication methods known to the art, a determination is made (404) whether or not that particular key 301 corresponds to the information appliance 100 from which the request was received. If none of the keys 301 in the receptacles 203 match, the request is rejected, while in an alternative embodiment, the request may be given only "public" or "anonymous" privileges. If a key 301 in one of the receptacles 203 does match, the security console 200

determines whether the functional role corresponding to the (matching) receptacle 203 has sufficient privileges to perform the request (405). If not, the request is rejected and the next receptacle 203 is tried, otherwise the request is filled (406). In an alternative embodiment, the functional role corresponding to the receptacle 203 containing the matching key 301 is used to determine the privileges granted to the requestor, and therefore in determining what parts of the request are fulfilled, and how, using standard access-control algorithms known to the art.

Referring to Fig. 4B, when the security console 200 requires services from a device (451), it accesses (452) the identity data stored in the key 301 that resides in the receptacle 203 corresponding to the information appliance's role (e.g., data storage, image capture, etc.) It uses the accessed data to encrypt and/or sign a request (453), using methods known to the art, so that the information appliance 100 can determine that the request was actually generated by the security console 200, and was actually intended for the specific information appliance 100. The request is then sent to the information appliance 100 (454).

Referring to Fig. 5A, when the information appliance 100 receives a request (501) from the security console 200, or from some other agency, it accesses the data (502) stored in the key 301 that is present in its single receptacle 103, and using cryptographic methods known to the art verifies or authenticates (503) that the request was actually generated by the security console 100. That is, it verifies that the request was actually generated by an entity that has access to the other key of the same key-pair (504), and that the request was intended for it. If this verification fails, the request is rejected (505) or, in an alternate embodiment, the request may be given an

"anonymous" level of privilege. If the verification succeeds, the request is fulfilled (504).

In further embodiments of these teachings the information appliance 100 may have two or more receptacles 103, where each of the receptacles may hold a different key 301, and where each key 301 represents a particular relationship that may exist between the information appliance 100 and the possessor of the other key 301 of the key-pair. For example, one receptacle 103 may contain a key 301 carrying data about the security console 200 of the appliance's "home" network, while another receptacle 103 may contain a key 301 carrying data about the security console 1200 of the network that the information appliance 100 is currently a "guest" in. This mode of operation is particularly useful for portable/mobile information appliances 100.

Referring to Fig. 5B, when the information appliance 100 requires the services of the security console (551), or has data to return to it, it accesses the data (552) contained on the key 301 in its single receptacle 103 (or, in alternate embodiments, on the key 301 in one or a plurality of receptacles 103 corresponding to its relationship with the particular security console 200 or other information appliance 100 with which it needs to communicate), and employs the accessed data to encrypt and/or sign the request (553), using methods known to the art. In this manner the security console 200 can determine (see Fig. 4A) that the request was actually generated by this information appliance 100, and was actually intended for the security console 200. The request is then sent from the information appliance to the security console 200 (554).

In this embodiment, all processes and information appliance 100s in the network that require secure services from some other information appliance 100 send their request to the

security console 200, using the methods disclosed above, and the security console 200 then acts as an intermediary between the various information appliance 100s and the resources that they provide. For example, a PDA information
5 appliance may access a mass data storage information appliance, via the security console 200. In other embodiments, any two information appliance 100s that need to communicate regularly may share a key-pair, allowing direct secure communication without the intervention of the
10 security console 200 as an intermediary.

When the role that a particular information appliance 100 plays in the network changes, as when a new information appliance 100 is added, or a previously installed information appliance 100 is removed, or some information
15 appliance 100 is changed from trusted to "guest" access or vice-versa, these and other adjustments in the security configuration are accomplished by adding, removing, or moving keys 301 from one receptacle 103/203 to another.

In an alternate embodiment, only the security console 200
20 and other object-controlling resources include receptacles 203, and the information appliances 100 come packaged with keys 301. To allow the information appliance 100 access to resources on the network, the key 301 corresponding to the information appliance 100 is inserted into the
25 corresponding receptacle 203 on the console 200 or other resource. In this case, each information appliance 100 has its own identity information built into the appliance proper, rather than residing on a separable key.

In another embodiment, only information appliances 100
30 include receptacles 103, and the security console 200 and other resource objects come packaged with keys corresponding to the various roles. To indicate that a particular information appliance 100 plays a given role in

the network, a key 301 from the security console 200 or other resource (corresponding to the desired role) is inserted into the receptacle 103 of the information appliance 100.

- 5 In accordance with an aspect of these teachings a newly-obtained information appliance 100 is added to a group of authorized information appliances 100, on behalf of a principal (such as a particular user), by providing a key 301 representing the principal to the receptacle 103 of
10 the information appliance 100. In this case the key 301 representing the principal contains data which includes at least one secret known only to the principal. For example, the secret known only to the principal may be the private half of a public-private key pair associated with an
15 asymmetric cryptosystem.

Further in this regard, a certain principal, and at least one information appliance 100 authorized to act on behalf of the principal, is granted a certain level of access to a certain resource by providing, to the receptacle 103
20 associated with an information appliance 100 representing the resource, a key 301 representing the principal. In this case data contained in the key 301 representing the principal can be the public half of a public-private key pair associated with an asymmetric cryptosystem.

- 25 In another embodiment the key 301 representing a principal could be embodied as a strip of paper or by some other matrix material that includes a computer-readable data portion and (optionally) an image of the principal. A holder can then be provided for holding or supporting the
30 computer-readable data portion such that at least the computer-readable data portion is accessible to the information appliance 100 or to the security console 200. This embodiment can be useful for, by example, establishing

guest privileges (limited authorization) to a user of an information appliance 100.

In yet a further embodiment of this invention the console 200 has pre-defined (or configurable) slots for receiving
5 keys that associate privileges for a user. In order to grant privileges to a device, a key is removed from the console 200 and placed in the device. The console 200 is configured such that the console operator can ascertain the name of a key that has been removed from the console 200.
10 An advantage of this embodiment is that privileges that may be granted to the device are immediately obvious by observing which privilege keys are missing from (removed from) the console 200. Conversely, the privileges that are not granted to a device can be ascertained by visual
15 inspection of the console 200.

In one possible embodiment, and referring to Fig. 6, a security console 601 is arranged to have rows that
associate a physical key 602 with a collection of physical keys 603 that represent privileges. Privileges 603 are
20 granted to a user's device 604, such as a PDA, by removing them from the console 601 and inserting them into the device 604, or directly to the physical key 602 which is itself inserted into the device 604. Those physical keys 602 removed from the console 601 are readily identified by
25 visual inspection as being open or empty slots 605.

It is important to recognize that in the foregoing and other embodiments of this invention the key 301 (or 602) is not intended to primarily establish the identity of a particular user or principal, but is instead intended to
30 provide and be instrumental in defining, using a tangible medium, a security configuration that bestows a certain level of authorization or access to a particular user or principal.

For example, if one desires to provide different levels of access rights to a particular program (e.g., an accounting information database or a human resources database), then instead of interacting with a complex configuration menu, a system administrator may instead simply insert keys 301 representing the various users (principals) into appropriate receptacles 203 having outputs coupled to a computer system that runs the program. Further in accordance with this example, there may be one system administrator receptacle 203 enabling total access to the program/database; a plurality of lower priority receptacles for enabling read/write access to some, but not all, of the program/database; and a further plurality of receptacles enabling read-only access to just a portion of the program/database. The owner of the database (principal) may insert his or her half of the key-pair into a receptacle 103 corresponding to the database, and provides the other half to a user who inserts his or her half of the key into an information appliance 100, such as a satellite computer or a PDA, thereby authorizing the user to interact with the program/database. In this case, and by example, if the owner inserts his or her half of the key into a 'system administrator' slot, then the user is authorized as a system administrator, while if the owner inserts his or her half of the key into a 'read-only' slot, then the user is authorized to read-only from the database.

In all of the foregoing embodiments the key 301 may be totally passive, such as by having a bar code or a magnetic stripe, while in other embodiments the key 301 could embody some degree of intelligence (e.g., a smart card).

Based on the foregoing description of presently preferred embodiments of these teachings it can be appreciated that there is also provided a computer program embodied on a computer-readable medium, such as in the security console

200 and/or the information appliances 100, for providing for the secure installation and use of the information system. The computer program contains code segments that are responsive to at least one key 301, containing security-related data, that is inserted into at least one receptacle 103, 203, for reading-out the security-related data for determining, for the information system, a desired security configuration.

While the invention has been particularly shown and described with respect to preferred embodiments thereof, it will be understood by those skilled in the art that changes in form and details may be made therein without departing from the scope and spirit of the invention.

CLAIMS

What is claimed is:

1. Apparatus for the secure installation and use of an information system having a plurality of nodes, where said plurality of nodes include at least one information appliance and at least one security console, comprising:

at least one data-carrying object containing security-related data; and

at least one object receptacle that comprises a portion of at least one of said nodes, a data-carrying object being inserted into said receptacle for reading-out the security-related data for indicating to the information system a desired security configuration.

2. Apparatus as in claim 1, wherein said data-carrying object stores the security-related data in a form that can be read-out by one of an electrical sensor, an optical sensor, or a magnetic sensor.

3. Apparatus as in claim 1, wherein said data-carrying object remains inserted in said receptacle for as long as the security configuration is desired to be in effect.

4. Apparatus as in claim 1, wherein said data-carrying object is temporarily made readable by said receptacle in order to initiate said security configuration.

5. Apparatus as in claim 1, wherein an information appliance has associated therewith at least one corresponding data-carrying object for inserting into said receptacle, wherein said receptacle has an output coupled

to said security console in an information system where the information appliance is intended to be used for indicating that the information appliance is one of a trusted information appliance or an untrusted information appliance.

6. Apparatus as in claim 1, wherein an information appliance is given access to information system resources, including information, by inserting a data-carrying object associated with said security console into said receptacle, said receptacle having an output that is coupled to said information appliance.

7. Apparatus as in claim 1, wherein each of said information appliance and said security console have associated therewith at least one corresponding data-carrying object, wherein a first receptacle has an output coupled to said security console in an information system where the information appliance is intended to be used for indicating, from security-related data contained on said data-carrying object associated with said information appliance, that the information appliance is one that is authorized to fulfil and originate requests for information system resources, and wherein a second receptacle has an output coupled to said information appliance for indicating, from security-related data contained on said data-carrying object associated with said security console, that said security console is authorized to fulfil and originate requests for information appliance resources, including information.

8. Apparatus as in claim 1, wherein said data-carrying objects are obtained as a pair, wherein a first receptacle has an output coupled to said security console in an information system where the information appliance is intended to be used for indicating, from security-related

data contained on a first one of said pair of data-carrying objects, that the information appliance is one that is authorized to fulfil and originate requests for information system resources, and wherein a second receptacle has an output coupled to said information appliance for indicating, from security-related data contained on a second one of said pair of data-carrying objects, that said security console is authorized to fulfil and originate requests for information appliance resources, including information.

9. Apparatus as in claim 1, wherein there are a plurality of said receptacles, and wherein an insertion of a data-carrying object into a first receptacle indicates different security-related information than inserting the data-carrying object into a second receptacle.

10. Apparatus as in claim 1, wherein said data-carrying objects are obtained as a pair, and wherein data-carrying objects in any given pair are the same shape, and no two data-carrying objects not in the same pair are the same shape.

11. Apparatus as in claim 1, wherein said data-carrying objects are obtained as a pair, and wherein data-carrying objects in any given pair are imprinted with a same visible identification information, and no two data-carrying objects not in the same pair are imprinted with the same visible identification information.

12. Apparatus as in claim 1, wherein said data-carrying objects are obtained as a pair, and wherein data-carrying objects in any given pair are fashioned so as to mechanically join together, and no two data-carrying objects not in the same pair will not or are unlikely to mechanically join together.

13. Apparatus as in claim 1, wherein data-carrying objects are obtained in groups of at least three, and where access to a resource, including information, is obtained by providing one subset of data-carrying objects from a group to a receptacle associated with a requestor of the resource, and a disjoint set of data-carrying objects from the same group is provided to the security console.

14. Apparatus as in claim 13, wherein identifications of all individual data-carrying objects in the group can be ascertained by viewing the security console, even if some subset of the data-carrying objects are provided to a receptacle associated with a requestor of the resource.

15. Apparatus as in claim 13, wherein a utilization of different disjoint subsets of the data-carrying objects in a group indicates different levels of trust to be granted to the requestor with respect to the resource.

16. Apparatus as in claim 13, wherein a utilization of different disjoint subsets of the data-carrying objects in a group indicates different levels of authorization to be granted to the requestor with respect to the resource.

17. Apparatus as in claim 13, wherein data-carrying objects in a particular group mechanically join together to form an assemblage, where the assemblage is adapted to be attached to a device through a single connection.

18. Apparatus as in claim 1, in which a newly-obtained information appliance is added to a group of authorized information appliances on behalf of a principal, by providing a data-carrying object representing the principal to a receptacle of the information appliance.

19. Apparatus as in claim 18, wherein said

data-carrying object representing the principal contains data which includes at least one secret known only to the principal.

20. Apparatus as in claim 19, wherein the secret known only to the principal comprises the private half of a public-private key pair associated with an asymmetric cryptosystem.

21. Apparatus as in claim 1, in which a certain principal, and at least one information appliance authorized to act on behalf of the principal, is granted a certain level of access to a certain resource by providing, to a receptacle associated with an information appliance representing the resource, a data-carrying object representing the principal.

22. Apparatus as in claim 21, wherein data contained in the data-carrying object representing the principal comprises the public half of a public-private key pair associated with an asymmetric cryptosystem.

23. Apparatus as in claim 22, in which the data-carrying object representing the principal comprises an image of the principal.

24. Apparatus as in claim 22, in which the data-carrying object representing the principal comprises a computer-readable data portion and an image of the principal.

25. Apparatus as in claim 24, further comprising a holder for holding the computer-readable data portion such that both the computer-readable data portion and the image are accessible.

26. A method for the secure installation and use of an information system having a plurality of nodes, where said plurality of nodes include at least one information appliance and at least one security console, comprising steps of:

providing at least one data-carrying object containing security-related data; and

inserting the data-carrying object into at least one object receptacle that comprises a portion of at least one of the nodes, the data-carrying object being inserted into the receptacle for reading-out the security-related data for indicating to the information system a desired security configuration.

27. A method as in claim 26, wherein the data-carrying object stores the security-related data in a form that can be read-out by one of an electrical sensor, an optical sensor, or a magnetic sensor.

28. A method as in claim 26, wherein the data-carrying object either remains inserted in the receptacle during the operation of the information system, or is temporarily inserted in or otherwise made readable by the receptacle either before or during the operation of the information system.

29. A method as in claim 26, wherein an information appliance has associated therewith at least one corresponding data-carrying object for inserting into the receptacle, wherein the receptacle has an output coupled to the security console in an information system where the information appliance is intended to be used for indicating that the information appliance is one of a trusted information appliance or an untrusted information

appliance.

30. A method as in claim 26, wherein an information appliance is given access to information system resources, including information, by inserting a data-carrying object associated with the security console into the receptacle, the receptacle having an output that is coupled to the information appliance.

31. A method as in claim 26, wherein each of the information appliance and the security console have associated therewith at least one corresponding data-carrying object, wherein a first receptacle has an output coupled to the security console in an information system where the information appliance is intended to be used for indicating, from security-related data contained on the data-carrying object associated with the information appliance, that the information appliance is one that is authorized to fulfil and originate requests for information system resources, and wherein a second receptacle has an output coupled to the information appliance for indicating, from security-related data contained on the data-carrying object associated with the security console, that the security console is authorized to fulfil and originate requests for information appliance resources, including information.

32. A method as in claim 26, wherein the data-carrying objects are provided as a pair, wherein a first receptacle has an output coupled to the security console in an information system where the information appliance is intended to be used for indicating, from security-related data contained on a first one of the pair of data-carrying objects, that the information appliance is one that is authorized to fulfil and originate requests for information system resources, and wherein a second receptacle has an

output coupled to the information appliance for indicating, from security-related data contained on a second one of the pair of data-carrying objects, that the security console is authorized to fulfil and originate requests for information appliance resources, including information.

33. A method as in claim 26, wherein there are a plurality of the receptacles, and wherein an insertion of a data-carrying object into a first receptacle indicates different security-related information than inserting the data-carrying object into a second receptacle.

34. A method as in claim 26, wherein the data-carrying objects are provided as a pair, and wherein data-carrying objects in any given pair are the same shape, and no two data-carrying objects not in the same pair are the same shape.

35. A method as in claim 26, wherein the data-carrying objects are provided as a pair, and wherein data-carrying objects in any given pair are imprinted with a same visible identification information, and no two data-carrying objects not in the same pair are imprinted with the same visible identification information.

36. A method as in claim 26, wherein the data-carrying objects are provided as a pair, and wherein data-carrying objects in any given pair are fashioned so as to mechanically join together, and no two data-carrying objects not in the same pair will not or are unlikely to mechanically join together.

37. A method as in claim 26, wherein data-carrying objects are obtained in groups of at least three, and where access to a resource, including information, is obtained by providing one subset of data-carrying objects from a group

to a receptacle associated with a requestor of the resource, and a disjoint set of data-carrying objects from the same group is provided to the security console.

38. A method as in claim 37, wherein identifications of all individual data-carrying objects in the group can be ascertained by viewing the security console, even if some subset of the data-carrying objects are provided to a receptacle associated with a requestor of the resource.

39. A method as in claim 37, wherein a utilization of different disjoint subsets of the data-carrying objects in a group indicates different levels of trust to be granted to the requestor with respect to the resource.

40. A method as in claim 37, wherein a utilization of different disjoint subsets of the data-carrying objects in a group indicates different levels of authorization to be granted to the requestor with respect to the resource.

41. A method as in claim 37, wherein data-carrying objects in a particular group mechanically join together to form an assemblage, where the assemblage is adapted to be attached to a device through a single connection.

42. A method as in claim 26, in which access to the resource is denied unless every data-carrying object of the group is inserted into a receptacle.

43. A method as in claim 26, and further comprising a step of adding a newly-obtained information appliance to a group of authorized information appliances, on behalf of a principal, by inserting a data-carrying object representing the principal to a receptacle of the information appliance.

44. A method as in claim 43, wherein the data-carrying

object representing the principal contains data which includes at least one secret known only to the principal.

45. A method as in claim 44, wherein the secret known only to the principal comprises the private half of a public-private key pair associated with an asymmetric cryptosystem.

46. A method as in claim 26, in which a certain principal, and at least one information appliance authorized to act on behalf of the principal, is granted a certain level of access to a certain resource by inserting, to a receptacle associated with an information appliance representing the resource, a data-carrying object representing the principal.

47. A method as in claim 21, wherein data contained in the data-carrying object representing the principal comprises the public half of a public-private key pair associated with an asymmetric cryptosystem.

48. A method as in claim 47, in which the data-carrying object representing the principal comprises an image of the principal.

49. A method as in claim 47, in which the data-carrying object representing the principal comprises a computer-readable data portion and an image of the principal.

50. A method as in claim 49, further comprising a step of providing a holder for holding the computer-readable data portion such that both the computer-readable data portion and the image are accessible.

51. A computer program embodied on a computer-readable

medium for providing for the secure installation and use of an information system having a plurality of nodes, where said plurality of nodes include at least one information appliance and at least one security console, comprising code segments responsive to at least one data-carrying object containing security-related data that is inserted into at least one object receptacle that comprises a portion of at least one of the nodes, for reading-out the security-related data for determining, for the information system, a desired security configuration.

**PHYSICAL KEY SECURITY MANAGEMENT METHOD AND APPARATUS
FOR INFORMATION SYSTEMS**

ABSTRACT OF THE DISCLOSURE

An apparatus and a method for enabling the secure installation and use of an information system having a plurality of nodes, where the plurality of nodes include at least one information appliance (100) and at least one security console (200). The apparatus includes at least one data-carrying object, referred to as a "key" (301), that contains security-related data, and further includes at least one key receptacle (103, 203) that forms a portion of at least one of the nodes. The key is inserted into the receptacle for reading-out the security-related data for indicating to the information system a desired security configuration. The key is not intended to primarily establish the identity of a particular user or principal, but is instead intended to provide and be instrumental in defining, using a tangible medium, a security configuration that bestows a certain level of authorization or access to a particular user or principal.

Information Appliance

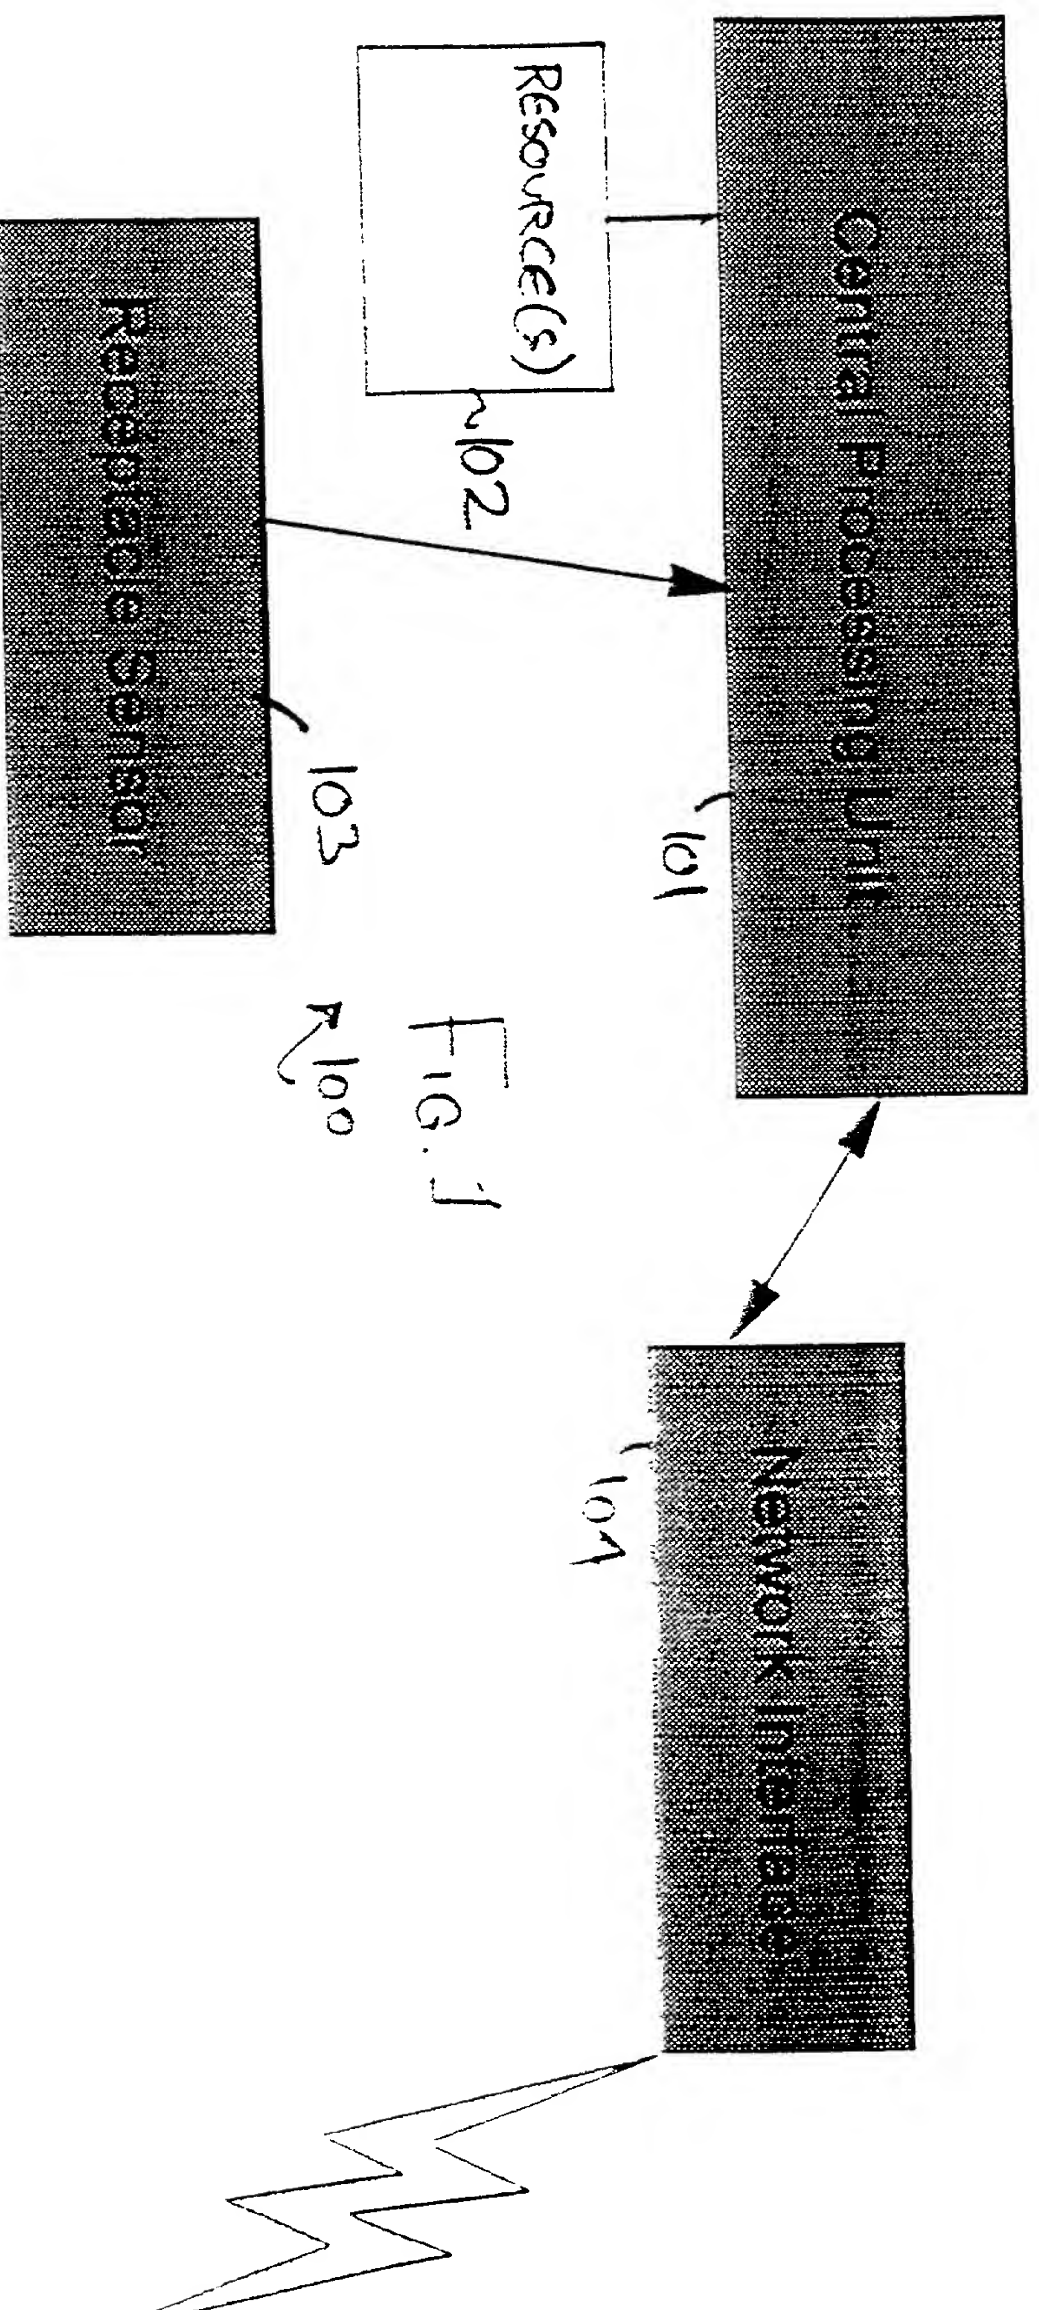
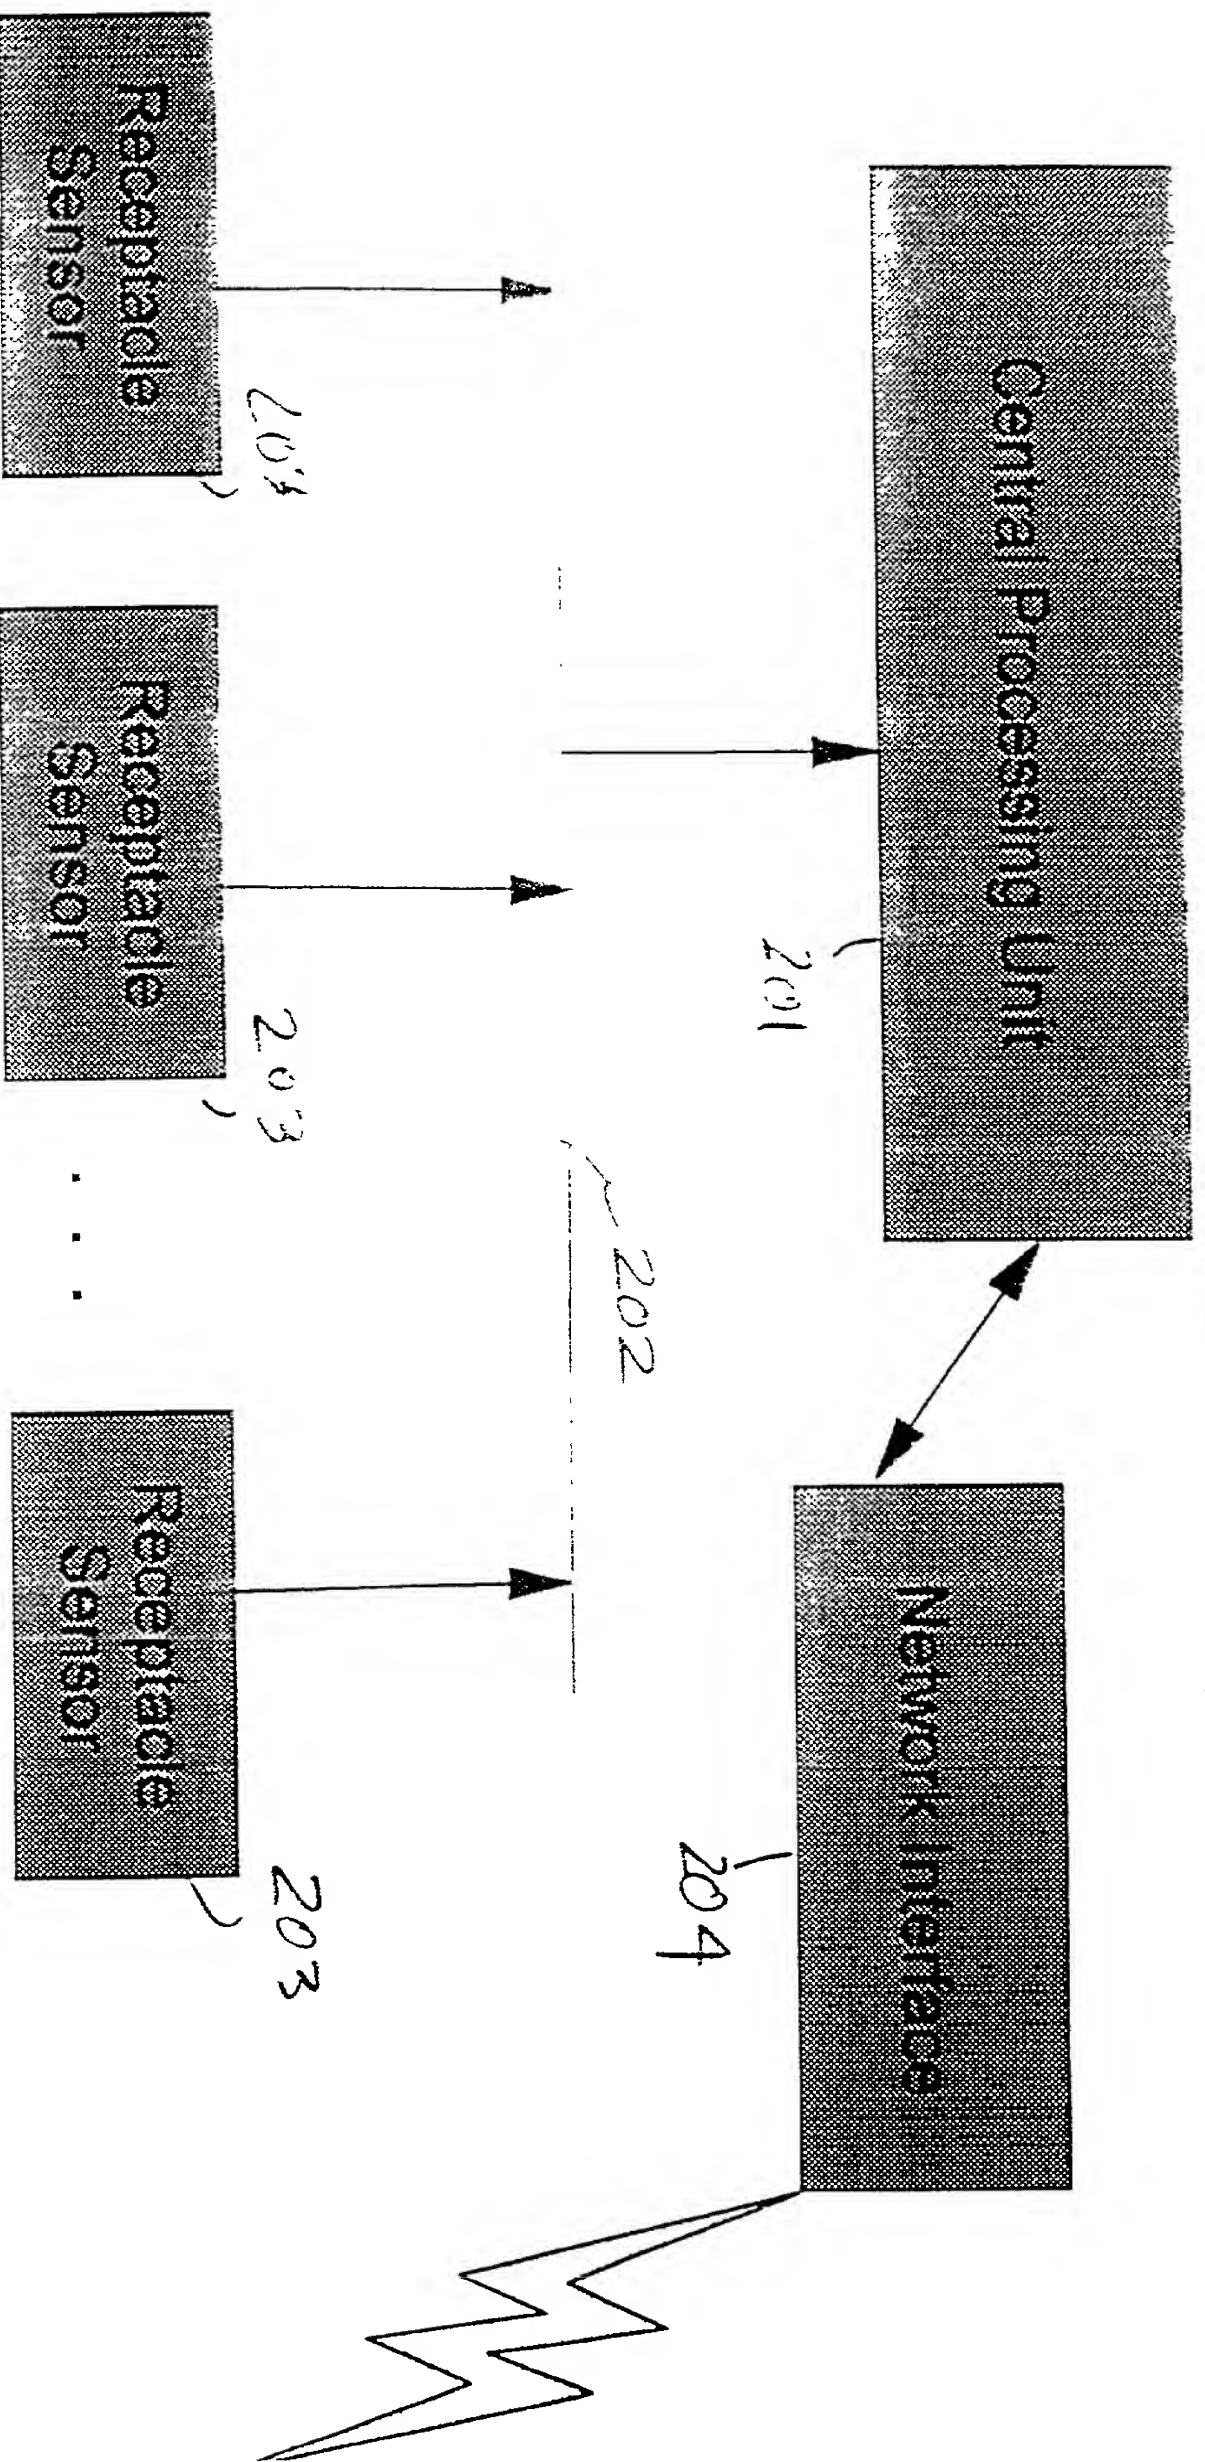


FIG. 1

Security Console

FIG. 2 2002







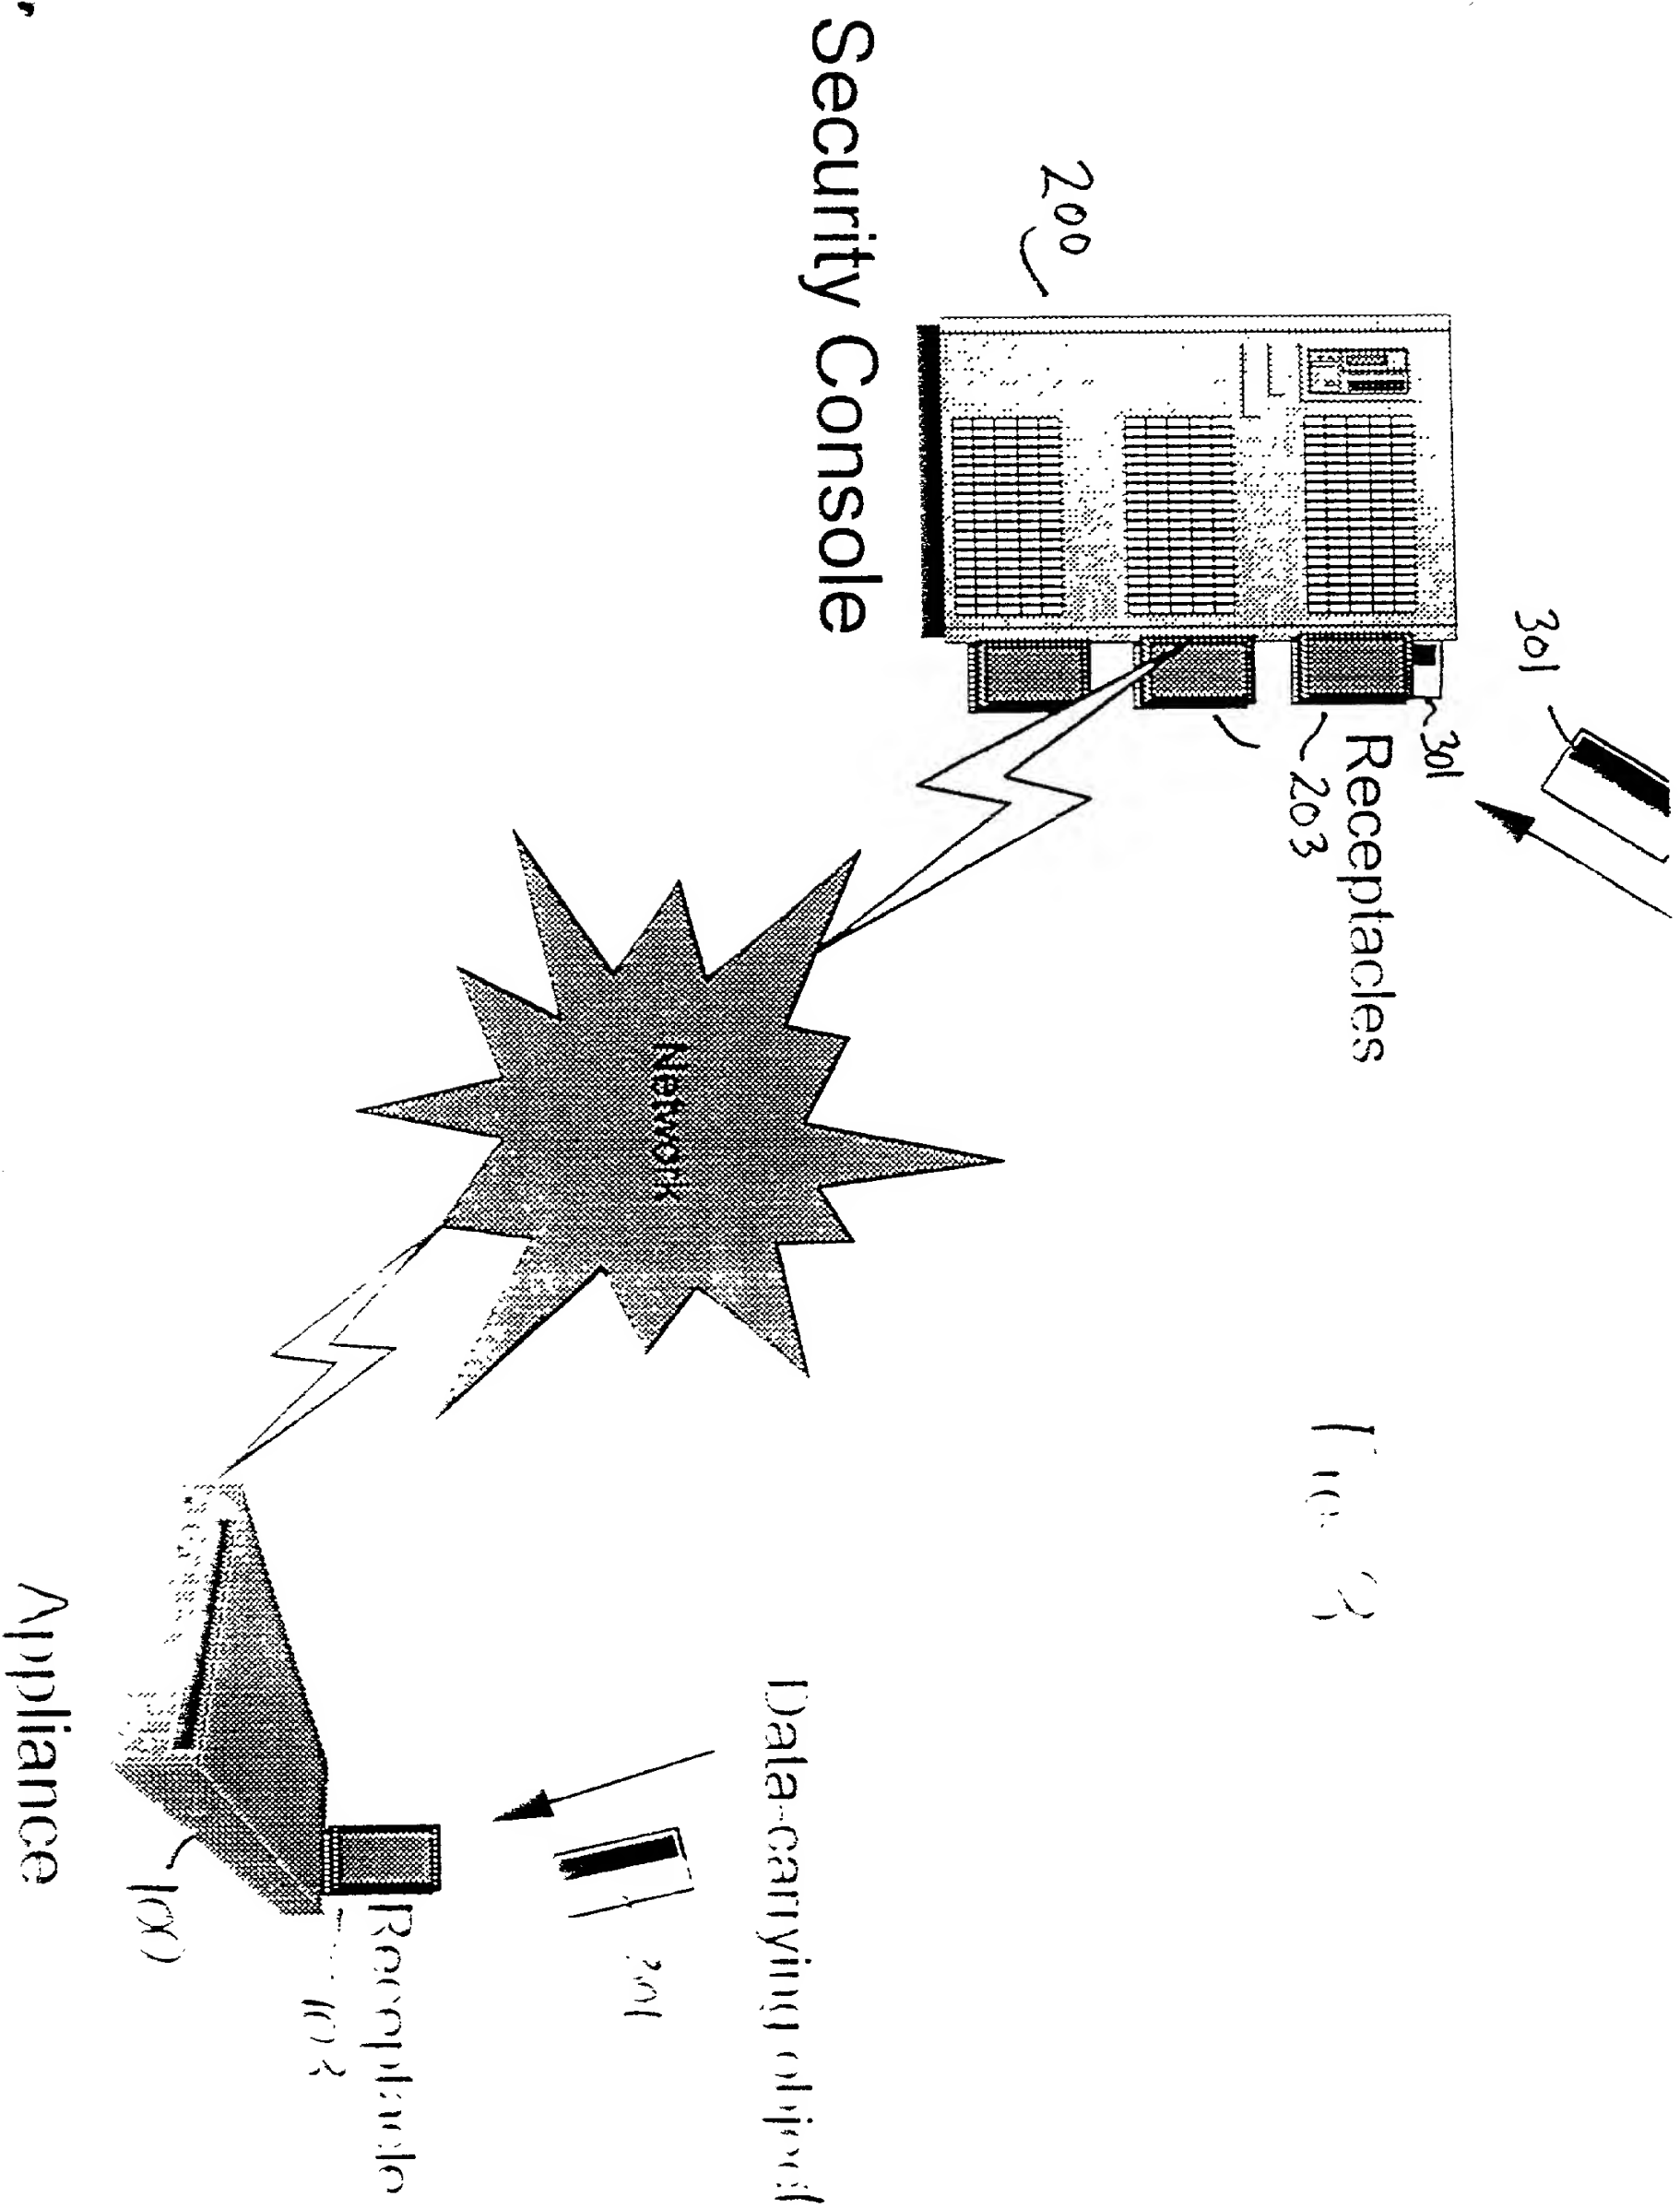


FIG. 2

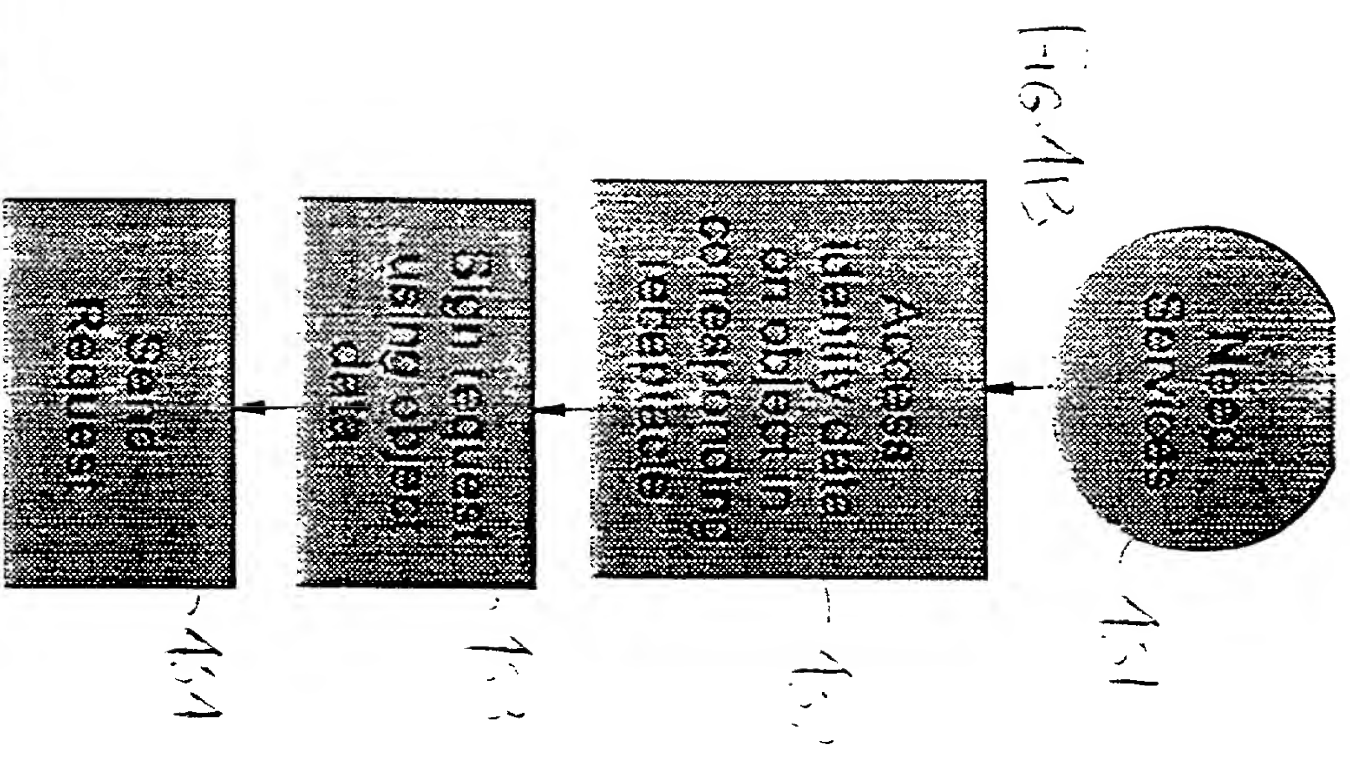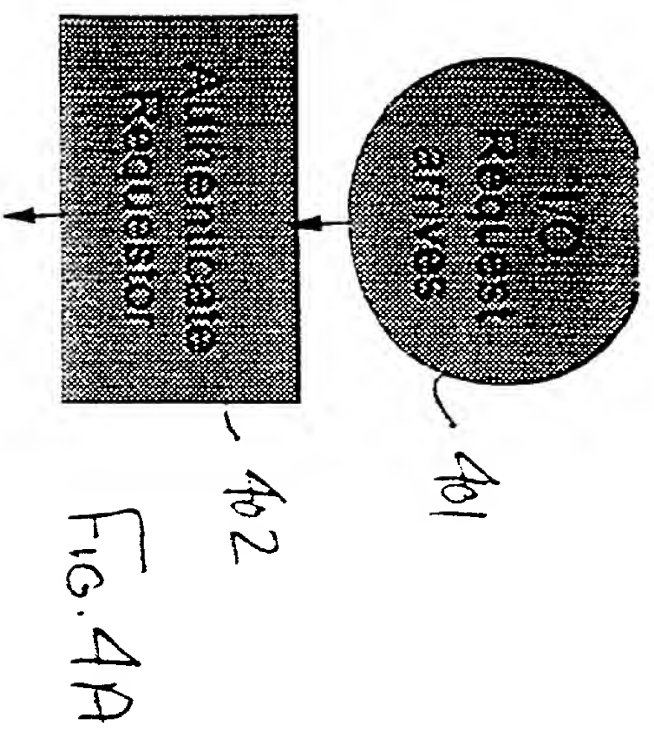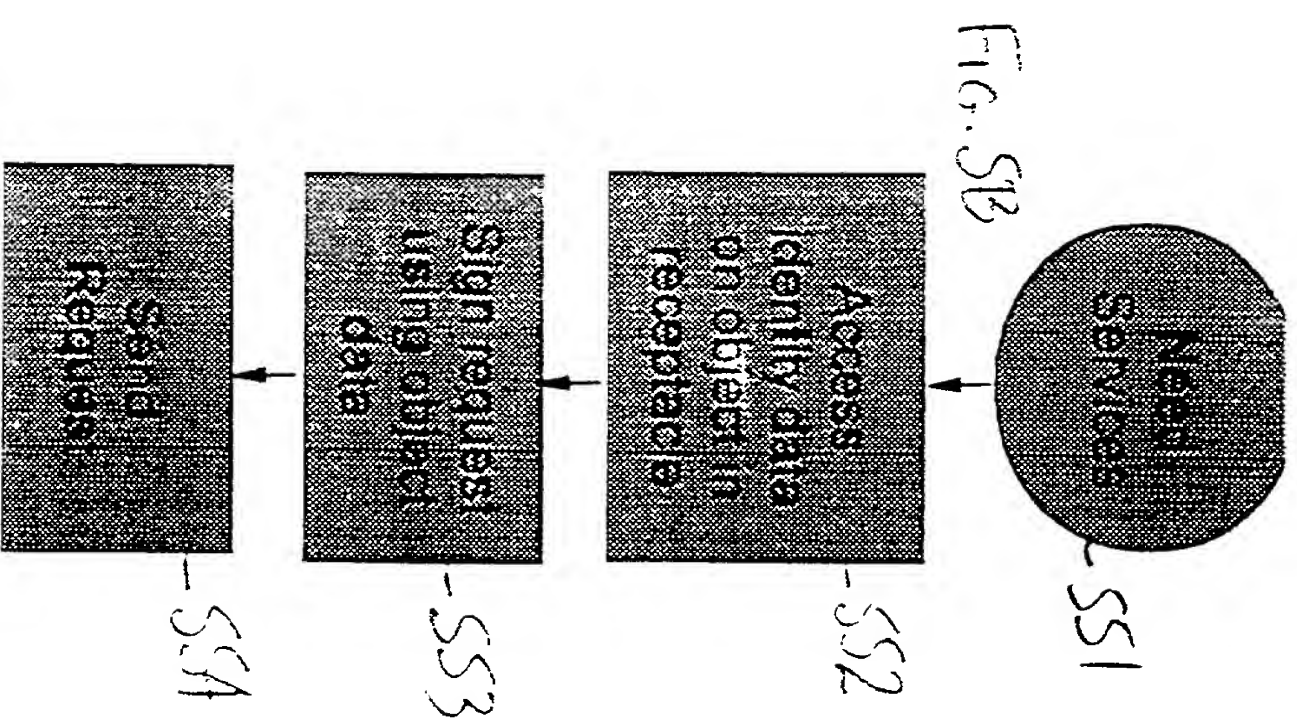

Control flows on security console

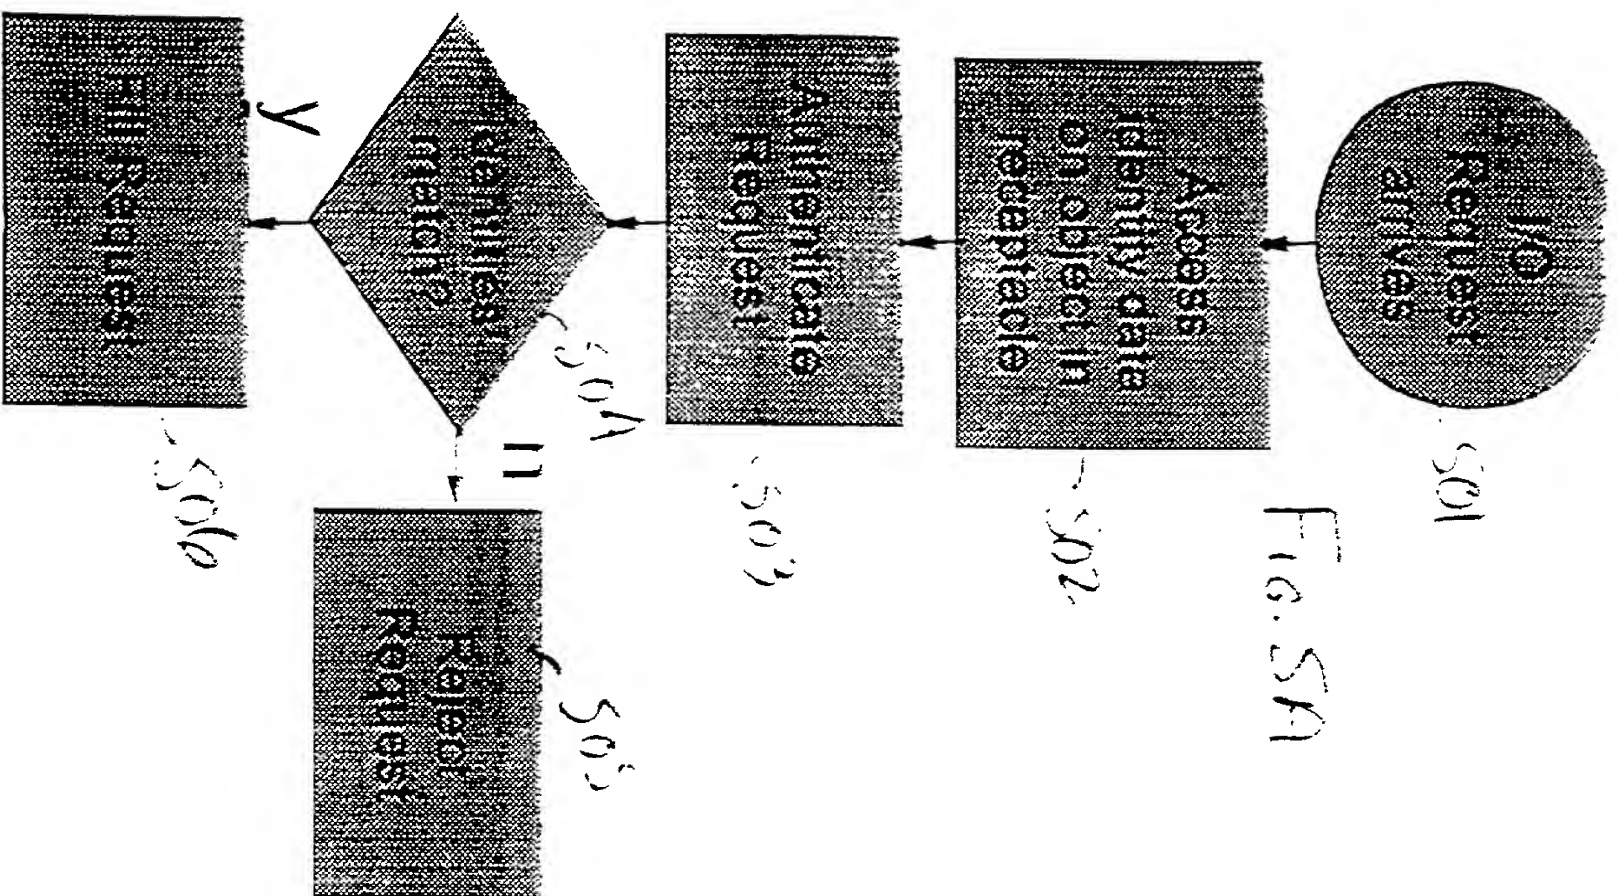

Control flows on
information


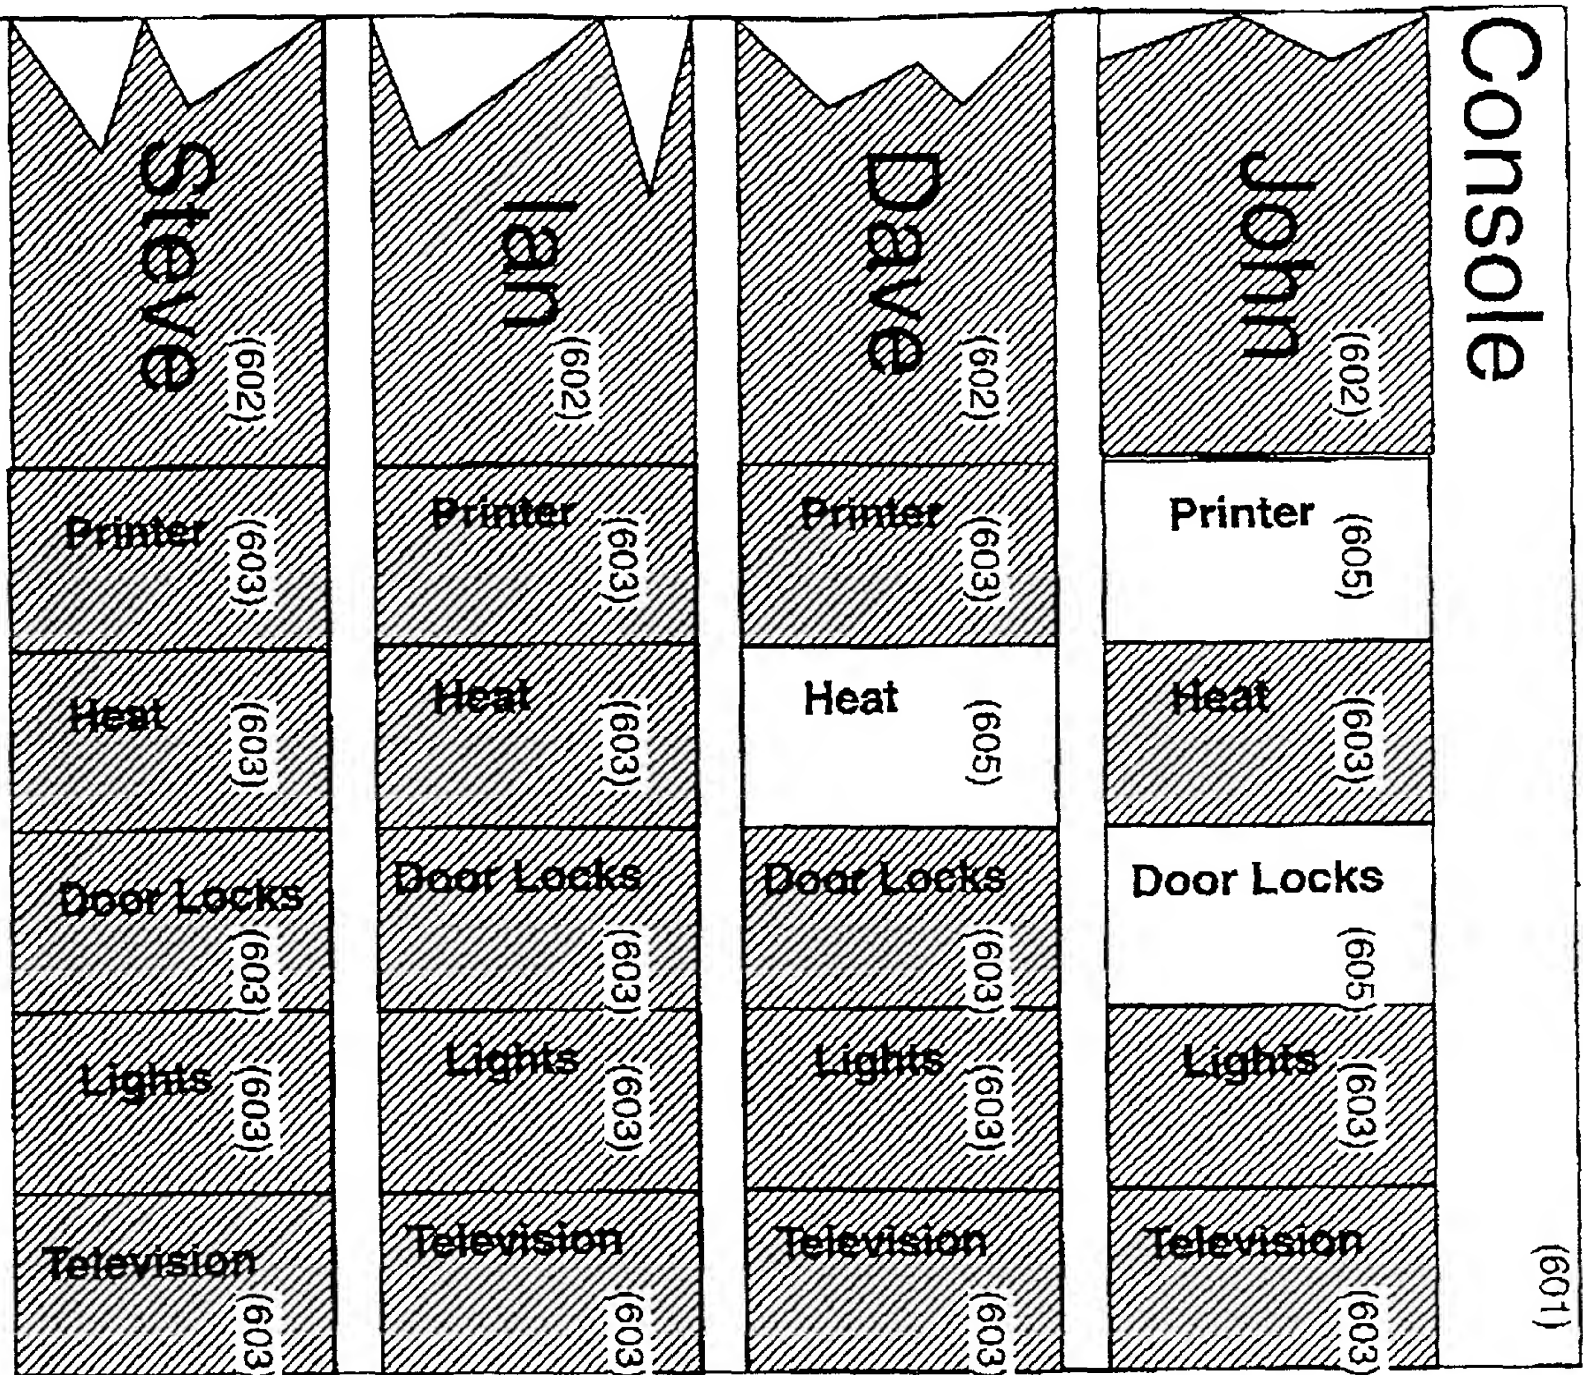


FIG. 6

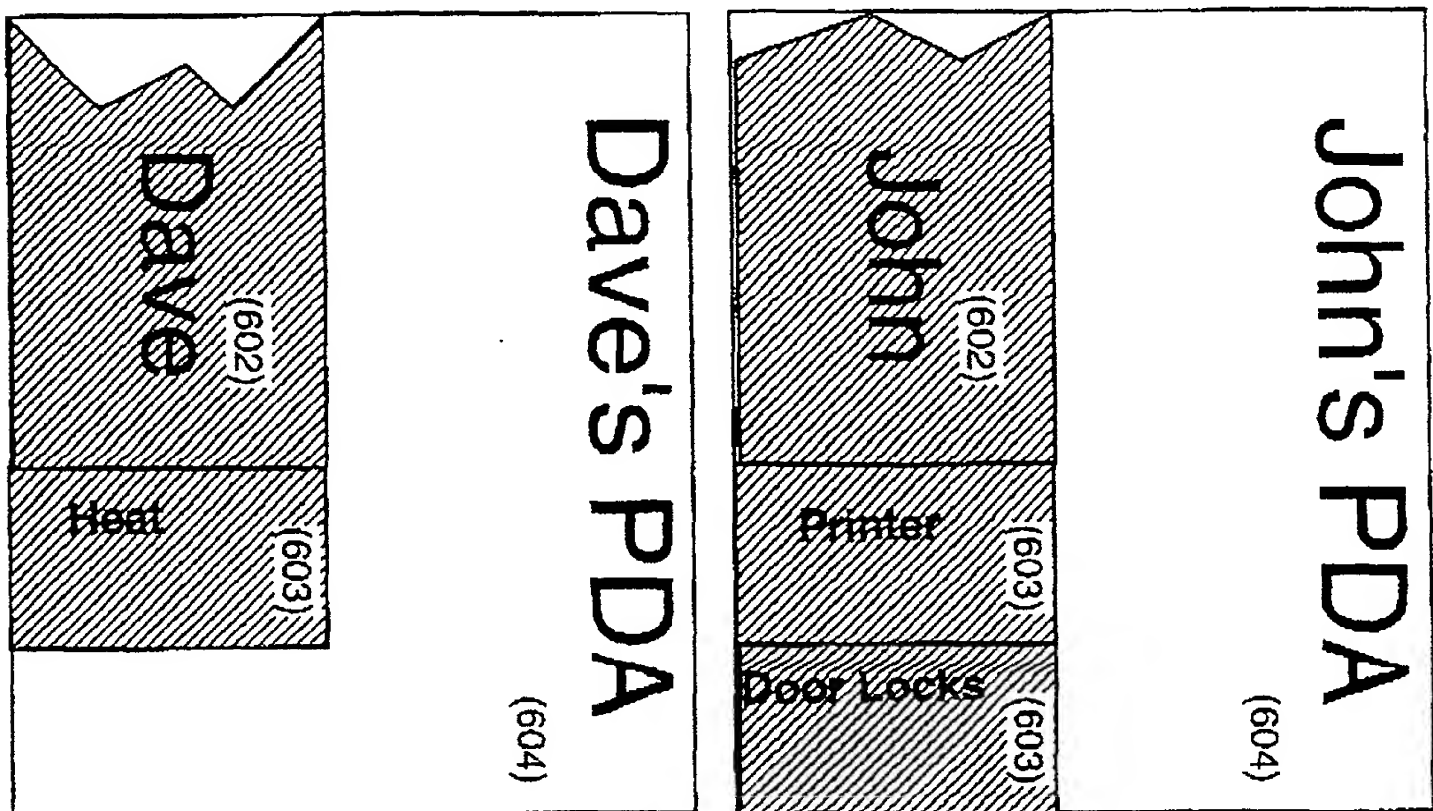

EXPRESS MAIL NO.: EL 568 962 368 US
DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Docket No. YOR9-1999-0564

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**PHYSICAL KEY SECURITY MANAGEMENT METHOD AND APPARATUS FOR
INFORMATION SYSTEMS**

the specification of which

(check one) ☒ is attached hereto.

_____ was filed on _____ as Application Serial No. _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate(s) listed below and have also identified below any foreign application(s) for patent or inventor's certificate(s) having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number) (Country) (Day/Mon/Year Filed) Yes No

I hereby claim the benefit under Title 35, United States Code, 119(e) and 120 of any United States application(s) listed below

and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Prov. Appl. No.)	(Filing Date)	(Status) (patent, pend., abandon.)
-------------------	---------------	---------------------------------------

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, as follows:

NAMES

Manny W. Schechter
Terry J. Ilardi
Christopher A. Hughes
Edward A. Pennington
John E. Hoel
Joseph C. Redmond, Jr.
Paul J. Otterstedt
Douglas W. Cameron
Wayne L. Ellenbogen
Stephen C. Kaufman
Daniel P. Morris
Louis J. Percello
Robert M. Trepp
David M. Shofi
Louis P. Herzberg

REGISTRATION NUMBERS

Reg. No. 31,722
Reg. No. 29,936
Reg. No. 26,914
Reg. No. 32,588
Reg. No. 26,279
Reg. No. 18,753
Reg. No. 37,411
Reg. No. 31,596
Reg. No. 43,602
Reg. No. 29,551
Reg. No. 32,053
Reg. No. 33,206
Reg. No. 25,933
Reg. No. 39,835
Reg. No. 41,500

SEND CORRESPONDENCE TO:

Harry F. Smith, Esq.
OHLANDT, GREELEY, RUGGIERO & PERLE, L.L.P.
One Landmark Square
Suite 903
Stamford, CT. 06901


DIRECT TELEPHONE CALLS TO:

Harry F. Smith, Esq.
Telephone: (203) 327-4500
Facsimile: (203) 327-6401

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME	LAST NAME	FIRST NAME	MIDDLE INITIAL
OF INVENTOR	CHESS	DAVID	M.
RESIDENCE &	CITY	STATE OR COUNTRY	CITIZENSHIP
CITIZENSHIP	MOHEGAN LAKE	NEW YORK	U.S.A.
POST OFFICE	P.O. ADDRESS	CITY & STATE	ZIP CODE
ADDRESS	1744 LAWRENCE ROAD	MOHEGAN LAKE, NY	10547

Inventor's
Signature




Date

8/14/2000

FULL NAME	LAST NAME	FIRST NAME	MIDDLE INITIAL
OF INVENTOR	WHALLEY	IAN	N.
RESIDENCE &	CITY	STATE OR COUNTRY	CITIZENSHIP
CITIZENSHIP	PAWLING	NEW YORK	ENGLAND
POST OFFICE	P.O. ADDRESS	CITY & STATE	ZIP CODE
ADDRESS	203 CHARLES COLMAN BLVD	PAWLING, NY	12564

Inventor's
Signature




Date

14 - Aug - 2000

FULL NAME	LAST NAME	FIRST NAME	MIDDLE INITIAL
OF INVENTOR	WHITE	STEVE	R.
RESIDENCE &	CITY	STATE OR COUNTRY	CITIZENSHIP
CITIZENSHIP	NEW YORK	NEW YORK	U.S.A.
POST OFFICE	P.O. ADDRESS	CITY & STATE	ZIP CODE
ADDRESS	225 E. 57TH ST.	NEW YORK, NY	10022

Inventor's
Signature

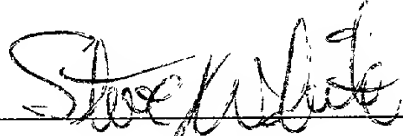


Date

8/14/2000

FULL NAME	LAST NAME	FIRST NAME	MIDDLE INITIAL
OF INVENTOR	MORAR	JOHN	F.
RESIDENCE &	CITY	STATE OR COUNTRY	CITIZENSHIP
CITIZENSHIP	MAHOPAC	NEW YORK	U.S.A.
POST OFFICE	P.O. ADDRESS	CITY & STATE	ZIP CODE
ADDRESS	53 HILLSIDE VIEW ROAD	MAHOPAC, NY	10541

Inventor's
Signature

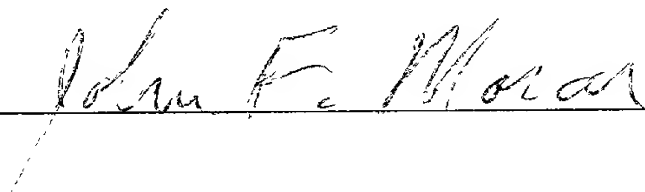

Date

8/14/00

00280"09T460

Express Mail No.: EL 568 962 368 US

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
In re Patent Application of:

INVENTOR: D.M. Chess et al.
SERIAL NO.: 09/ ART UNIT:
FILED: Herewith EXAMINER:
TITLE: PHYSICAL KEY SECURITY MANAGEMENT METHOD AND
APPARATUS FOR INFORMATION SYSTEMS
ATTORNEY DOCKET NO.: YOR9-1999-0564

Hon. Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATE ATTORNEY

Dear Sir:

The undersigned attorney, who has been appointed as an Attorney of Record in the Declaration and Power of Attorney for the above-identified patent application, hereby appoints:

Harry F. Smith, Esq.
Reg. No.: 32,493
OHLANDT, GREELEY, RUGGIERO & PERLE, L.L.P.
One Landmark Square
Suite 903
Stamford, CT. 06901


as his Associate Attorney to prosecute said application and to transact all business in the United States Patent and Trademark Office connected therewith.

Please direct all official communications and telephone calls to:

Harry F. Smith, Esq.
OHLANDT, GREELEY, RUGGIERO & PERLE, L.L.P.
One Landmark Square
Suite 903
Stamford, CT. 06901
Telephone: (203) 327-4500
Facsimile: (203) 327-6401

Respectfully submitted,

8/16/00
Date

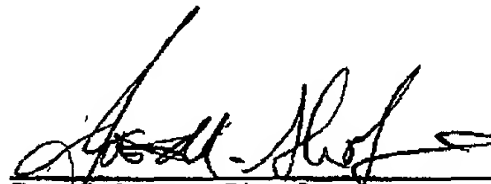

David M. Shof, Esq.
Reg. No.: 39,835
IBM Corporation
IP Law Department
Yorktown Heights, New York 10598
(914) 945-3247